


# CABLE MANAGEMENT

## SCREW-IN - SECURELY FASTEN WIRES TO CONCRETE AND OTHER HARD SURFACES

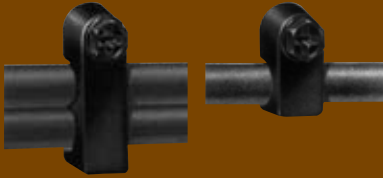

### Features:

For fastening all RG-59 and RG-6 series coax cables to wood or other "soft" materials, or in masonry with pre-drilled hole Route wires / fiber optics along concrete, brick, mortar, stucco, and block with a predrilled hole, and wood without anchors.

- Integral strain relief grips to hold clips on wire - no need to hold clip while installing it.
- Won't crush fiber optic cables. Match the O.D. of the cable to the diameters listed below to select the right clip for your applications.

- Small and aesthetically pleasing and won't interfere with décor.
- Weather-proof, ultraviolet (UV) stabilized material protects against deterioration.
- Insulated to protect against shorts during installation / removal.
- Screw breaks free from clip when tightened - eliminates twisting / binding of cable upon installation.
- Black color blends in with substrate material - less obvious

### ORDERING INFORMATION

ITW Linx Part Number	Cable Type	Cable Diameter	Color	Pin Length (driven)	Mechanical
SI-8	Dual RG-59 or RG-56 or	0.23" - 0.28"	Black	0.70"	<p>(SI-8 has to be purchased of minimum 2000)</p>
SI-9	2 and 3 Pair or	0.14" - 0.17"	Black	0.75"	<p>(SI-9 has to be purchased of minimum 2000)</p>
SI-11	RG-59 or RG-6 or	0.23" - 0.31"	Black	0.66"	<p>(SI-11 has to be purchased of minimum 2000)</p>

\* Questions about ordering? Please contact us at **1-800-336-LINX** / Contact an authorized distributor for pricing \*

Screw-In

